

**Cooling**

**Tolerance** d04

**Coating** AlphaSlide Rainbow



**Strategy** **HSC** **HPC**

**Application**

**Features** **HA**



- Optimized face geometry for excellent surfaces and highest dimensional accuracy
  - Defined microbevel for support and stabilization
  - Polished chip space for ideal chip evacuation
- 
- Multipass milling of 3D contours
- 
- Tolerance D1: -0.001/-0.006 mm
  - Tolerance D3: 0/-0.02 mm
  - Radius tolerance r: 0/-0.003 mm (measured from 0-90°)

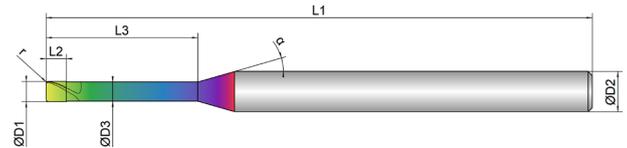

**Roughing**






**Finishing**



	D1	D3	L2	L3	L1	D2	z	r		$\alpha$
EXN1-M16-0103	 mm Ø	 mm Ø	 mm	 mm	 mm	 mm Ø	 #	 mm	 °	 °
<b>0,8X2</b>	0.8	0.78	0.8	2.0	50.0	4.0	2	0.20	30	16
<b>0,8X4</b>	0.8	0.78	0.8	4.0	50.0	4.0	2	0.20	30	16
<b>0,8X6</b>	0.8	0.78	0.8	6.0	50.0	4.0	2	0.20	30	16
<b>0,8X8</b>	0.8	0.78	0.8	8.0	50.0	4.0	2	0.20	30	16
<b>0,8X10</b>	0.8	0.78	0.8	10.0	50.0	4.0	2	0.20	30	16
<b>0,8X12</b>	0.8	0.78	0.8	12.0	50.0	4.0	2	0.20	30	16
<b>1X2</b>	1.0	0.95	1.0	2.0	50.0	4.0	2	0.20	30	16
<b>1X3</b>	1.0	0.95	1.0	3.0	50.0	4.0	2	0.20	30	16
<b>1X4</b>	1.0	0.95	1.0	4.0	50.0	4.0	2	0.20	30	16
<b>1X5</b>	1.0	0.95	1.0	5.0	50.0	4.0	2	0.20	30	16
<b>1X6</b>	1.0	0.95	1.0	6.0	50.0	4.0	2	0.20	30	16
<b>1X8</b>	1.0	0.95	1.0	8.0	50.0	4.0	2	0.20	30	16
<b>1X10</b>	1.0	0.95	1.0	10.0	50.0	4.0	2	0.20	30	16

EXN1-M16-0103	D1	D3	L2	L3	L1	D2	z	r		$\alpha$
	 mm $\varnothing$	 mm $\varnothing$	 mm	 mm	 mm	 mm $\varnothing$	 #	 mm		
1X12	1.0	0.95	1.0	12.0	55.0	4.0	2	0.20	30	16
1X15	1.0	0.95	1.0	15.0	60.0	4.0	2	0.20	30	16
1X20	1.0	0.95	1.0	20.0	60.0	4.0	2	0.20	30	16
1X25	1.0	0.95	1.0	25.0	70.0	4.0	2	0.20	30	16
1X30	1.0	0.95	1.0	30.0	70.0	4.0	2	0.20	30	16
1,2X5	1.2	1.14	1.2	5.0	50.0	4.0	2	0.20	30	16
1,2X10	1.2	1.14	1.2	10.0	50.0	4.0	2	0.20	30	16
1,2X15	1.2	1.14	1.2	15.0	55.0	4.0	2	0.20	30	16
1,2X20	1.2	1.14	1.2	20.0	60.0	4.0	2	0.20	30	16
1,5X4	1.5	1.44	1.5	4.0	50.0	4.0	2	0.20	30	16
1,5X6	1.5	1.44	1.5	6.0	50.0	4.0	2	0.20	30	16
1,5X8	1.5	1.44	1.5	8.0	50.0	4.0	2	0.20	30	16
1,5X10	1.5	1.44	1.5	10.0	50.0	4.0	2	0.20	30	16
1,5X12	1.5	1.44	1.5	12.0	55.0	4.0	2	0.20	30	16
1,5X15	1.5	1.44	1.5	15.0	55.0	4.0	2	0.20	30	16
1,5X20	1.5	1.44	1.5	20.0	60.0	4.0	2	0.20	30	16
1,5X25	1.5	1.44	1.5	25.0	60.0	4.0	2	0.20	30	16
1,5X30	1.5	1.44	1.5	30.0	70.0	4.0	2	0.20	30	16
1,8X8	1.8	1.74	1.8	8.0	50.0	4.0	2	0.20	30	16
1,8X10	1.8	1.74	1.8	10.0	50.0	4.0	2	0.20	30	16
1,8X15	1.8	1.74	1.8	15.0	50.0	4.0	2	0.20	30	16
1,8X20	1.8	1.74	1.8	20.0	55.0	4.0	2	0.20	30	16
2X4	2.0	1.91	2.0	4.0	50.0	4.0	2	0.20	30	16
2X6	2.0	1.91	2.0	6.0	50.0	4.0	2	0.20	30	16
2X8	2.0	1.91	2.0	8.0	50.0	4.0	2	0.20	30	16

EXN1-M16-0103	 D1 mm ∅	 D3 mm ∅	 L2 mm	 L3 mm	 L1 mm	 D2 mm ∅	 z #	 r mm	 °	 α °
2X10	2.0	1.91	2.0	10.0	50.0	4.0	2	0.20	30	16
2X12	2.0	1.91	2.0	12.0	55.0	4.0	2	0.20	30	16
2X15	2.0	1.91	2.0	15.0	55.0	4.0	2	0.20	30	16
2X20	2.0	1.91	2.0	20.0	60.0	4.0	2	0.20	30	16
2X25	2.0	1.91	2.0	25.0	70.0	4.0	2	0.20	30	16
2X30	2.0	1.91	2.0	30.0	70.0	4.0	2	0.20	30	16
2X35	2.0	1.91	2.0	35.0	80.0	4.0	2	0.20	30	16
2X40	2.0	1.91	2.0	40.0	80.0	4.0	2	0.20	30	16
2,5X15	2.5	2.41	2.5	15.0	55.0	4.0	2	0.20	30	16
2,5X20	2.5	2.41	2.5	20.0	55.0	4.0	2	0.20	30	16
2,5X25	2.5	2.41	2.5	25.0	60.0	4.0	2	0.20	30	16
2,5X30	2.5	2.41	2.5	30.0	70.0	4.0	2	0.20	30	16
3X6	3.0	2.91	4.5	6.0	50.0	4.0	2	0.20	30	16
3X8	3.0	2.91	4.5	8.0	50.0	4.0	2	0.20	30	16
3X10	3.0	2.91	4.5	10.0	50.0	4.0	2	0.20	30	16
3X12	3.0	2.91	4.5	12.0	50.0	4.0	2	0.20	30	16
3X15	3.0	2.91	4.5	15.0	55.0	4.0	2	0.20	30	16
3X20	3.0	2.91	4.5	20.0	55.0	4.0	2	0.20	30	16
3X25	3.0	2.91	4.5	25.0	60.0	4.0	2	0.20	30	16
3X30	3.0	2.91	4.5	30.0	70.0	4.0	2	0.20	30	16
3X35	3.0	2.91	4.5	35.0	80.0	4.0	2	0.20	30	16
3X40	3.0	2.91	4.5	40.0	80.0	4.0	2	0.20	30	16
3X45	3.0	2.91	4.5	45.0	90.0	4.0	2	0.20	30	16



Download Catalog Pages (PDF)

Dimension	Ø 0.8x2			Ø 0.8x12			Ø 1x2			Ø 1x30		
Infeed in mm	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.06xD	ae= 0.03xD	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.015xD	ae= 0.01xD
Application	ap= 0.2xD	ap= L2 max	ap= 0.1xD	ap= 0.05xD	ap= L2 max	ap= 0.03xD	ap= 0.2xD	ap= L2 max	ap= 0.1xD	ap= 0.01xD	ap= L2 max	ap= 0.01xD

Material	Strength (N/mm <sup>2</sup> )	Feed (mm/Z)	Vc (m/min)	fz											
N	NON-FERROUS														
1.1	ALUMINIUM   alloyed	<500	500	0.016	0.02	0.022	0.012	0.015	0.017	0.025	0.03	0.035	0.01	0.015	0.02
1.2	ALUMINIUM   alloyed	<600	480	0.016	0.02	0.022	0.012	0.015	0.017	0.025	0.03	0.035	0.01	0.015	0.02
2.1-2.3	ALUMINIUM   casted	<600	450	0.015	0.018	0.021	0.011	0.014	0.016	0.022	0.027	0.032	0.008	0.013	0.017
3.1-3.3	COPPER   alloyed	<650	220	0.014	0.016	0.02	0.01	0.013	0.015	0.019	0.024	0.029	0.006	0.011	0.014
4.1	MAGNESIUM   alloyed	<250	500	0.016	0.02	0.022	0.012	0.015	0.017	0.025	0.03	0.035	0.01	0.015	0.02
5.1	PLASTICS   Thermoplastic	<100	400	0.015	0.018	0.021	0.011	0.014	0.016	0.022	0.027	0.032	0.008	0.013	0.017
5.2	PLASTICS   Duroplastic	<150	350	0.014	0.016	0.02	0.01	0.013	0.015	0.019	0.024	0.029	0.006	0.011	0.014

Dimension	Ø 1.2x5			Ø 1.2x20			Ø 1.5x4			Ø 1.5x30		
Infeed in mm	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.04xD	ae= 0.015xD	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.03xD	ae= 0.01xD
Application	ap= 0.2xD	ap= L2 max	ap= 0.1xD	ap= 0.03xD	ap= L2 max	ap= 0.015xD	ap= 0.2xD	ap= L2 max	ap= 0.1xD	ap= 0.02xD	ap= L2 max	ap= 0.01xD

Material	Strength (N/mm <sup>2</sup> )	Feed (mm/Z)	Vc (m/min)	fz											
N	NON-FERROUS														
1.1	ALUMINIUM   alloyed	<500	500	0.025	0.03	0.035	0.02	0.025	0.03	0.025	0.03	0.035	0.015	0.02	0.025
1.2	ALUMINIUM   alloyed	<600	480	0.025	0.03	0.035	0.02	0.025	0.03	0.025	0.03	0.035	0.015	0.02	0.025
2.1-2.3	ALUMINIUM   casted	<600	450	0.022	0.027	0.032	0.017	0.022	0.027	0.022	0.027	0.032	0.013	0.017	0.022
3.1-3.3	COPPER   alloyed	<650	220	0.019	0.024	0.029	0.014	0.019	0.024	0.019	0.024	0.029	0.011	0.014	0.019
4.1	MAGNESIUM   alloyed	<250	500	0.025	0.03	0.035	0.02	0.025	0.03	0.025	0.03	0.035	0.015	0.02	0.025
5.1	PLASTICS   Thermoplastic	<100	400	0.022	0.027	0.032	0.017	0.022	0.027	0.022	0.027	0.032	0.013	0.017	0.022
5.2	PLASTICS   Duroplastic	<150	350	0.019	0.024	0.029	0.014	0.019	0.024	0.019	0.024	0.029	0.011	0.014	0.019

Dimension	Ø 1.8x8			Ø 1.8x20			Ø 2x4			Ø 2x40		
Infeed in mm	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.13xD	ae= 0.05xD	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.015xD	ae= 0.01xD
Application	ap= 0.2xD	ap= L2 max	ap= 0.1xD	ap= 0.1xD	ap= L2 max	ap= 0.05xD	ap= 0.2xD	ap= L2 max	ap= 0.1xD	ap= 0.01xD	ap= L2 max	ap= 0.01xD

Material	Strength (N/mm <sup>2</sup> )	Feed (mm/Z)	Vc (m/min)	fz											
N	NON-FERROUS														
1.1	ALUMINIUM   alloyed	<500	500	0.03	0.035	0.04	0.025	0.03	0.035	0.03	0.035	0.04	0.02	0.025	0.03
1.2	ALUMINIUM   alloyed	<600	480	0.03	0.035	0.04	0.025	0.03	0.035	0.03	0.035	0.04	0.02	0.025	0.03
2.1-2.3	ALUMINIUM   casted	<600	450	0.027	0.031	0.035	0.022	0.026	0.03	0.027	0.031	0.035	0.017	0.021	0.025
3.1-3.3	COPPER   alloyed	<650	220	0.024	0.027	0.03	0.019	0.022	0.025	0.024	0.027	0.03	0.014	0.017	0.02
4.1	MAGNESIUM   alloyed	<250	500	0.03	0.035	0.04	0.025	0.03	0.035	0.03	0.035	0.04	0.02	0.025	0.03
5.1	PLASTICS   Thermoplastic	<100	400	0.027	0.031	0.035	0.022	0.026	0.03	0.027	0.031	0.035	0.017	0.021	0.025
5.2	PLASTICS   Duroplastic	<150	350	0.024	0.027	0.03	0.019	0.022	0.025	0.024	0.027	0.03	0.014	0.017	0.02

**ADVICE** | Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

ae/ap(max) = 0.5x corner radius!

Dimension	Ø2.5x15			Ø2.5x30			Ø3x6			Ø3x45		
Infeed in mm	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.09xD	ae= 0.04xD	ae= 1xD	ae= 0.25xD	ae= 0.1xD	ae= 1xD	ae= 0.05xD	ae= 0.02xD
Application	ap= 0.2xD	ap= L2 max	ae= 0.1xD	ap= 0.07xD	ap= L2 max	ae= 0.04xD	ap= 0.2xD	ap= L2 max	ae= 0.1xD	ap= 0.04xD	ap= L2 max	ae= 0.02xD

	Material	Strength (N/mm <sup>2</sup> )	Feed (mm/Z)	fz											
<b>N</b>	<b>NON-FERROUS</b>		<b>Vc (m/min)</b>												
1.1	ALUMINIUM   alloyed	<500	500	0.03	0.035	0.04	0.025	0.03	0.035	0.033	0.038	0.043	0.025	0.03	0.035
1.2	ALUMINIUM   alloyed	<600	480	0.03	0.035	0.04	0.025	0.03	0.035	0.033	0.038	0.043	0.025	0.03	0.035
2.1-2.3	ALUMINIUM   casted	<600	450	0.027	0.031	0.035	0.022	0.026	0.03	0.03	0.034	0.038	0.022	0.026	0.03
3.1-3.3	COPPER   alloyed	<650	220	0.024	0.027	0.03	0.019	0.022	0.025	0.027	0.03	0.033	0.019	0.022	0.025
4.1	MAGNESIUM   alloyed	<250	500	0.03	0.035	0.04	0.025	0.03	0.035	0.033	0.038	0.043	0.025	0.03	0.035
5.1	PLASTICS   Thermoplastic	<100	400	0.027	0.031	0.035	0.022	0.026	0.03	0.03	0.034	0.038	0.022	0.026	0.03
5.2	PLASTICS   Duroplastic	<150	350	0.024	0.027	0.03	0.019	0.022	0.025	0.027	0.03	0.033	0.019	0.022	0.025

**ADVICE** | Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.



ae/ap(max) = 0.5x corner radius!

# EXPLANATION

## APPLICATIONS

 Multipass milling	 Trimming	 Deburring	 Engraving
 Corner rounding	 Full slot milling	 Forward and backward deburring	

## COOLINGS


 Air-cooling	 Dry machining	 Oil cooling	 Cooling Lubricant
 Minimum quantity lubrication			

## FEATURES

 0,5xD	 1xD	 1,5xD	 2xD
 2,5xD	 3xD	 3,5xD	 4xD
 5xD	 Center cutting	 Non-center cutting	 Without Weldon
 With Weldon	 Internal cooling	 Dynamic helical pitch	 Chip breaker
 Unequal tooth pitch	 Roughing teeth	 Helical immersion	 Feed directions x,y
 Feed directions x, y, z	 Feed directions x, y, (z)	 Corner radius	 Corner bevel
 Sharp edged			

## STRATEGY

 ETC	Extended Trochoidal Cutting	 HPC	High Performance Cutting	 HSC	High Speed Cutting	 MTC	Multi Task Cutting
 UNI	Universal Machining						

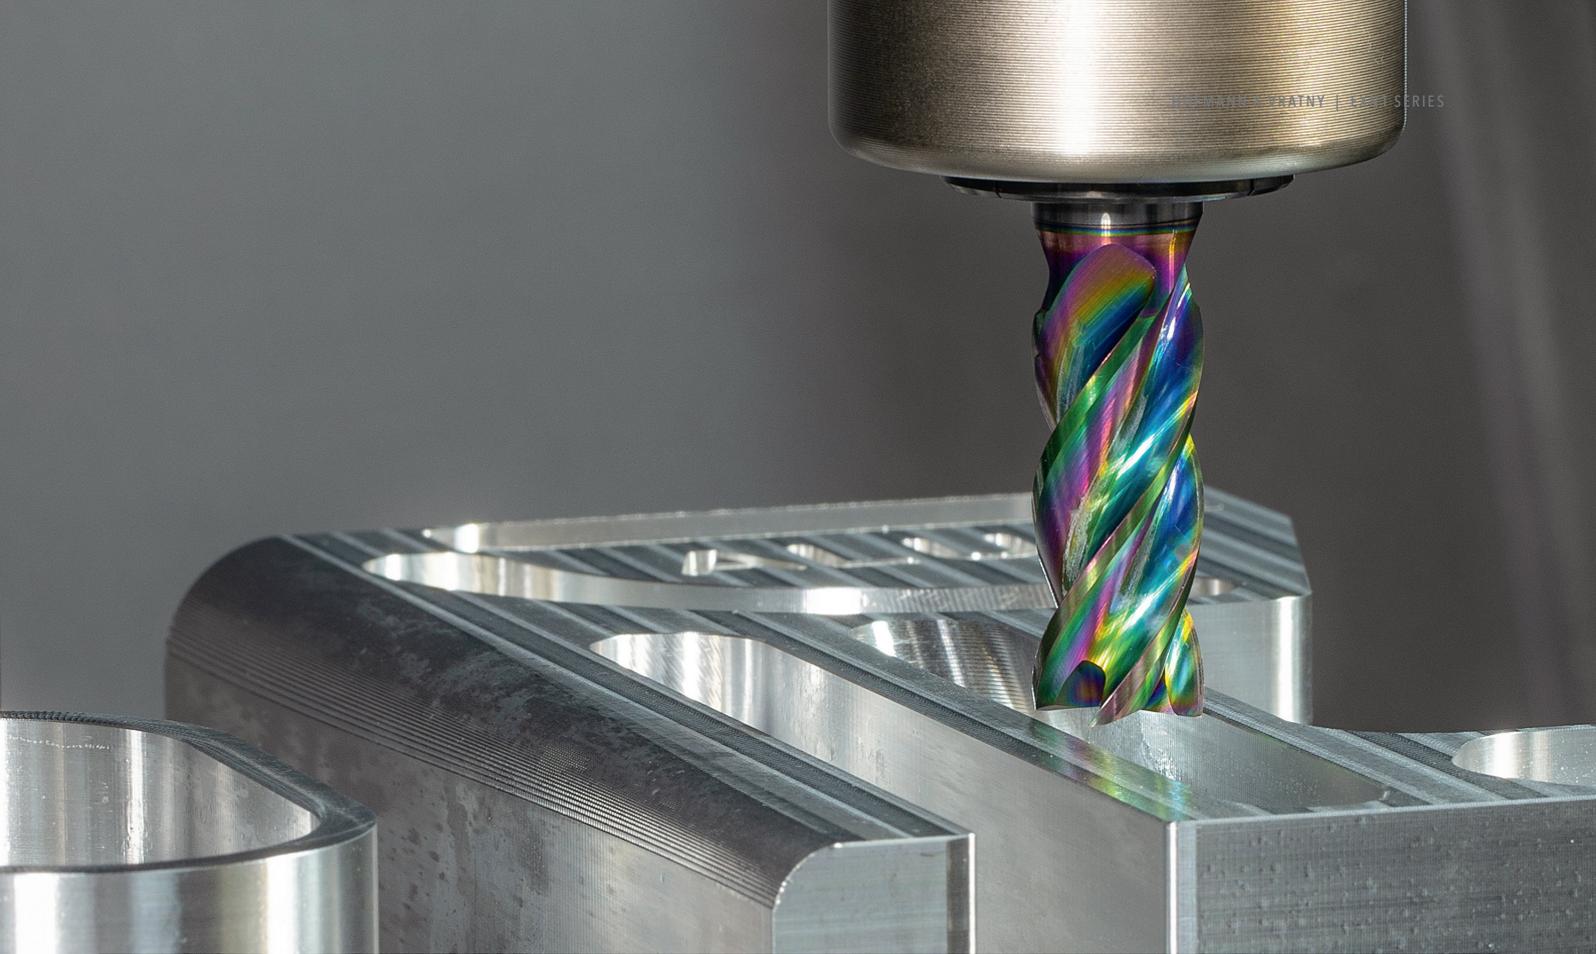

**PROPERTIES**

 Cutting diameter	 Small cutting diameter	 Large cutting diameter	 Undercut diameter
 Cutting length	 Total bevel length	 Undercut length	 Total length
 Shank diameter	 Number of teeth	 Corner radius	 Corner bevel
 Programming radius	 Maximum cutting depth	 Helical angle	 Alpha angle

**APPLICATION TABLE**

The values given in the application table are only guidelines. These values are largely dependent on the machining situation and application.

**FIGURES**

All technical drawings and photographs are given as an example. The product may deviate from the original in terms of colour and dimensions.

## N 1.1 ALUMINIUM | alloyed <500 N/mm<sup>2</sup>

Materialnumber	Germany   DIN	Europe   EN	France   AFNOR	Great Britain   BS	Italy   UNI	Sweden   SIS	Spain   UNE	Japan   JIS	USA   AISI
3.0205	Al99	AW-1200	A 4	1 C	P-Al99,0	4010	L-3001	A1200	AA1200
3.0250	Al99.5H		A 59050 C	L 31					AA1000
3.0255	Al99.5	AW-1050 A	A 5	L 31	P-AIP99.5	4007	L-3051	A1050	AA1050 A
3.0275	Al99.7	AW-1070 A	A 7	2L 48	P-AIP99.7	4005	L-3071	A1070	AA1070 A
3.0280	Al99.8								
3.0285	Al99.8	AW-1080 A	A 8	1A	P-Al99.8	4004	L-3081	A1080	AA1080 A
3.0305	Al99.9	AW-1090							
3.0505	AlMn 0.5 Mg 0.5	AW-3105		N 31				A3105	AA3105
3.0506	AlMn 0.6	AW-3207							
3.0515	AlMn 1	AW-3103		N 3	P-AlMn 1.2	4067	L-3811	A3103	AA3103
3.0517	AlMn 1 Cu	AW-3003	A-M1		P-AlMn 1.2 Cu		L-3810	A3003	AA3003
3.0525	AlMn 1 Mg 0.5	AW-3005	A-MG0,5					A3005	AA3005
3.0526	AlMn 1 Mg 1	AW-3004	A-M1G		P-AlMn 1.2 Mg	GA/6511	L-3820	A3004	AA3004
3.0915	AlFeSi	AW-8011A							
3.1255	AlCu 4 SiMg	AW-2014	A-U45G	H 15	P-AlCu 4.4 SiMnMg		L-3130	A2014	AA2014
3.1305	AlCu 2.5 Mg	AW-2117	A-U2G	L 86	P-AlCu 2.5 MgSi		L-3180	A2117	AA2117
3.1324	AlCu 4 MgSi	AW-2017 A							
3.1325	AlCuMg1	AW-2017 A	A-U4G	H 14	P-AlCu 4.5 MgMn	GA631	L-3120	A2017	AA2017 A
3.1355	AlCuMg2	AW-2024	A-U4G1	L 97 / L 98	P-AlCu 4.5 MgMn	5	L-3140	A2024	AA2024
3.1371	G-AlCu 4 TiMg	AC-21000							
3.1841	G-AlCu 4 Ti	AC-21100							
3.2134	G-AlSi 5 Cu 1,3 Mg	AC-45300							
3.2307	Al99.85 MgSi								
3.2315	AlMgSi 1	AW-6082	A-SGM0,7	H 30	P-AlMgSi	4212	L-3453		AA6082
3.3206	AlMgSi 0.5	AW-6060	A-GS	H 9	P-AlMgSi	4140	L-3442		AA6060
3.3208	Al99.9 MgSi	AW-6401							
3.3210	AlMgSi 0.7	AW-6005 A							
3.3211	AlMg 1 SiCu	AW-6061	A-GSUC	H 20	P-AlMg 1 SiCu		L-3420	A6061	AA6061
3.3241	G-AlMg 3 Si								
3.3261	G-AlMg 5 Si	AC-51400							
3.3292	GD-AlMg 9	AC-51200							
3.3307	Al99.85 Mg 0.5	AW-5110							
3.3308	Al99.9 Mg 0.5	AW-5210							
3.3315	AlMg1	AW-5005 A	A-G0,6	N 41	P-AlMg 0.9	4106	L-3350	A5005	AA5005 A
3.3316	AlMg 1.5	AW-5050	A-G1,5	3L 44	P-AlMg 1.5		L-3380		AA5050 B
3.3317	Al99.85 Mg 1	AW-5305							
3.3318	Al99.9 Mg 1	AW-5505							
3.3326	AlMg 1.8	AW-5051 A							
3.3345	AlMg 4.5	AW-5082	A-G4,5		P-AlMg 4.4			A5082	AA5082
3.3523	AlMg 2.5	AW-5052	A-G2,5C	L 80 / L 81	P-AlMg 2.5	4120	L-3360	A5052	AA5052
3.3525	AlMg 2 Mn 0.3	AW-5251	A-G2M	N4	P-AlMg 2 Mn		L-3361		AA5251
3.3527	AlMg 2 Mn 0.8	AW-5049	A-G2,5MC					A5049	AA5049
3.3535	AlMg 3	AW-5754	A-G3M		P-AlMg 3.5	4130	L-3390		AA5754
3.3537	AlMg 2.7 Mn	AW-5454	A-G2,5MC		P-AlMg 2.7 Mn	4130	L-3391		AA5454
3.3541	G-AlMg 3	AC-51100							
3.3545	AlMg 4 Mn	AW-5086	A-G4MC		P-AlMg 4.4		L-3382		AA5086
3.3547	AlMg 4.5 Mn	AW-5083	A-G4,5MC	N 8	P-AlMg 4.5	4140	L-3321	A5083	AA5083
3.3549	AlMg 5 Mn	AW-5182							
3.3555	AlMg 5	AW-5019							
3.3561	G-AlMg 5	AC-51300							

## N 1.2 ALUMINIUM | alloyed <600 N/mm<sup>2</sup>

Materialnumber	Germany   DIN	Europe   EN	France   AFNOR	Great Britain   BS	Italy   UNI	Sweden   SIS	Spain   UNE	Japan   JIS	USA   AISI
3.0615	AlMgSiPb	AW-6012	A-SGPb		P-AlSiMgMn		L-3452		AA6012
3.1645	AlCu 4 PbMgMn	AW-2007				4355	L-3121	A2007	AA2007
3.1655	AlCu 6 BiPb	AW-2011	A-U5PbBi	FC 1	P-AlCu 5.5 PbBi	4338	L-3192	A2011	AA2011
3.4335	AlZn 4.5 Mg 1	AW-7020	A-Z5G	H 17		4425	L-3741		AA7020
3.4345	AlZnMgCu 0.5	AW-7022	A-Z4GU						AA7022
3.4365	AlZnMgCu 1.5	AW-7075	A-Z5GU	2L 95	P-AlZn 5.8 MgCu		L-3710	A7075	AA7075

**N 2.1 - N 2.3 ALUMINIUM | casted <600 N/mm<sup>2</sup>**

Materialnumber	Germany   DIN	Europe   EN	France   AFNOR	Great Britain   BS	Italy   UNI	Sweden   SIS	Spain   UNE	Japan   JIS	USA   AISI
3.1841	G-AlCu 4 Ti							AC1A	A 295.0
3.1871	G-AlCu 4 TiMg								
3.2131	G-AlSiCu1								
3.2151	G-AlSi 6 Cu 4	AC-45000	A-S5UZ	LM 4				AC4B	A 319.0
3.2161	G-AlSi 8 Cu 3	AC-46200	A-S9U3A-Y4	LM 24	5075			AC4D	A 328.0
3.2163	GD-AlSi 9 Cu 3								
3.2211	G-AlSi 11								
3.2341	G-AlSi 5 Mg								
3.2371	G-AlSi 7 Mg 0,3	AC-42100						AC4CH	A 356.0
3.2373	G-AlSi 9 Mg	AC-43300							
3.2381	G-AlSi 10 Mg	AC-43100							
3.2382	GD-AlSi 10 Mg								
3.2383	G-AlSi 10 Mg(Cu)	AC-43400	A-S10G	LM 9	3049	4253		ADC3	A 360.2
3.2581	G-AlSi 12	AC-47100	A-S13	LM 6	4514	4261		AC3A	A 413.2
3.2582	GD-AlSi 12					4247		ADC1	A 413.0
3.2583	G-AlSi 12 Cu	AC-44300	A-S12-Y4	LM 20	5079	4260		ADC1	A 413.1
3.2585	SG-AlSi12								
3.2982	GD-AlSi 12 Cu								
3.3241	G-ALMg 3 Si								
3.3261	G-ALMg 5 Si								
3.3561	G-ALMg 5							AC7A	A 514.0

**N 3.1 COPPER | alloyed <600 N/mm<sup>2</sup>**

Materialnumber	Germany   DIN	Europe   EN	France   AFNOR	Great Britain   BS	Italy   UNI	Sweden   SIS	Spain   UNE	Japan   JIS	USA   AISI
2.0060	E-Cu 57	CW-004A							B-120
2.0065	E-Cu 58	CW-004A	Sn-a2	C 101					C 11000
2.0070	SE-Cu	CW-020A	Cu-c1	C 101					C 10300
2.0082	G-Cu L 45			HCC 1					C 81100
2.0085	G-Cu L 50	CC-040A		HCC 1					C 81100
2.0240	CuZn 15	CW-502L	CuZn 15	CZ 102				C 2300	C 23000
2.0265	CuZn 30	CW-505L	CuZn 30	CZ 102				C 2600	C 26000
2.0321	CuZn 37	CW-508L	CuZn 37	CZ 180	C 2720				C 27200
2.0340	G-CuZn 37 Pb	CC-754S-GM							
2.0492	G-CuZn 15 Si 4	CC-761S-GS							B-198
2.0592	G-CuZn 35 Al 1	CC-765S	U-Z 36 N 3	HTB 1					C 86500
2.0595	G-KCuZn 37 Al 1	CC-766S							
2.0596	G-CuZn 34 Al 2	CC-764S	U-Z 36 N 3						
2.0857	CuNi 3 Si	CW-112C							
2.0916	CuAl 5								
2.0927	SG-CuAl 9 Ni 5 Fe								
2.0936	CuAl 10 Fe 3 Mn 2	CW-306G	U-A 10 Fe	CA 103					
2.0966	CuAl 10 Ni 5 Fe 4	CW-307G	U-A 10 N	CA 104					C 63000
2.1006	SG-CuSn								
2.1050	G-CuSn 10	CC-480K-GS		CT 1					C 90700
2.1052	G-CuSn 12	CC-483K-GS	UE 12 P	Pb 2					C 91700
2.1060	G-CuSn 12 Ni 2	CC-484K-GS							C 91700
2.1090	G-CuSn 7 ZnPb		UE 7 Z5 Pb 4						C 93200
2.1093	G-CuSn 6 ZnNi			LG 4					
2.1096	G-CuSn 5 ZnPb		UE 5 Pb 5 Z 5	LG 2					C 83600
2.1176	G-CuPb 10 Sn	CC-495K-GS	UE 10 Pb 10	LB 2					C 93700
2.1182	G-CuPb 15 Sn	CC-496K-GS	U-Pb 15 E 8	LB 1					C 93800
2.1188	G-CuPb 20 Sn	CC-497K-GS	U-Pb 20	LB 5					C 94100
2.1266	CuCd 1								
2.1292	G-CuCrF 35	CC-140C		CC1-FF					C 81500
2.1293	CuCrZr	CW-106C	U-Cr 0.8 Zr	CC 102					C 81500
2.1322	CuMg 0.4								
2.1355	CuMn 2								
2.1461	SG-CuSi 3	CW-116C							

**N 4.1** **MAGNESIUM** | alloyed <200 N/mm<sup>2</sup>

Materialnumber	Germany   DIN	Europe   EN	France   AFNOR	Great Britain   BS	Italy   UNI	Sweden   SIS	Spain   UNE	Japan   JIS	USA   AISI
3.5101	G-MgZn 4 SE1 Zr 1	MC-35110	G-Z 4 Tr	MAG-5					ZE 41
3.5102	G-MgZn 5 Th2 Zr1								
3.5103	MgSE 3 Zn2 Zr1	MC-65120	G-Tr 3 Z 2	MAG-6					EZ 33
3.5105	G-MgTh 3 Zn2 Zr1								QE 22
3.5106	G-MgAg 3 SE2 Zr1	MC-65210	G-Ag 22.5	MAG-12					
3.5200	G-MgAl 8 Zn 1	MA-40020							
3.5312	MgAl 3 Zn	MA-21130							
3.5314	MgAl 3 Zn		G-A3 Z1	MAG-E-111					AZ 31 B
3.5470	GD-MgAl 4 Si 1	MC-21320							
3.5612	GD-MgAl 6 Zn 3	MC-21140							
3.5614	MgAl 6 Zn		G-A6 Z1	MAG-E-121					AZ 61 A
3.5662	GD-MgAl 6								
3.5812	G-MgAl 8 Zn 1	MC-21110	G-A9						AZ 81
3.5912	G-MgAl 9 Zn 1	MC-21120	G-A 9 Z 1						AZ 91

**N 5.1** **PLASTICS** | thermoplastics <100 N/mm<sup>2</sup>

Materialnumber	Germany   DIN	Europe   EN	France   AFNOR	Great Britain   BS	Italy   UNI	Sweden   SIS	Spain   UNE	Japan   JIS	USA   AISI
PC	Makralon		Orgalan	Sirvet					Lexan
PC	Nuclon								Merlon
PC	Plastocarbon								
PE	Baylon			Fertene	Carlona				Althon
PE	Dekalen			Eraclene	Escorene				Bakelite
PE	Lupolen								Chemplex
PE	Hostalen								Dylan
PF	Alberit			Fenachem					Biralit
PF	Bakelit			Moldesile					Biratex
PF	Bulitol								Birax
PF	Durax								
PF	Harex								
PF	Resinol								
PFTE	Hostaflon		Soreflon						Halon; Teflon
PP	Vestolen PP		Eitex P	Moplen	Carola P				Profax
PP	Synalen PP		Napryl	Kastilen	Procom				Rexene
PP	Novolen								Tenite
PP	Hostalen PP								
PS	Hostylon			Sdistir	Lustrex				Carinex
PS	Lorkalen			Lastinol					Dylene
PS	Polystyrol								Toporex
PS	Styropor								
PVC	Coroplast								
PVC	Hostalit								
PVC	Mipolam								
PVC	Opalon								
PVC	Solvec								
PVC	Vinoflex								
PP-H	Homopolymer								
PP-C	Copolymer								
ABS	Acrylnitrid Butadien Styrol								
PMMA	Polymethyl metha Crylat								
PMMA	Plexiglas; Resarit; Degluan								
POMC	Polyoxymethylen								
POMC	Hostaform; ultraform								
PI	Polymid								
PEI	Polytherimid								
PVC-H	Polyvinylchlorid (hard)								
PA	Polyamide								

## N 5.2 PLASTICS | duroplastics <150 N/mm<sup>2</sup>

Materialnumber	Germany   DIN	Europe   EN	France   AFNOR	Great Britain   BS	Italy   UNI	Sweden   SIS	Spain   UNE	Japan   JIS	USA   AISI
PUR 5220									
PF 31									
MP 183									

### Technical formulas

Calculate cutting speed (m/min)

$$V_c = \frac{D \cdot \pi \cdot n}{1000}$$

Calculate rotational speed (rpm)

$$n = \frac{V_c \cdot 1000}{D \cdot \pi}$$

Calculate feed rate (mm/min)

$$V_f = n \cdot z \cdot f_z$$

Calculate feed per tooth (mm/number of teeth)

$$f_z = \frac{V_f}{n \cdot z}$$

Calculate chip removal rate (cm<sup>3</sup>/min)

$$Q = \frac{a_p \cdot a_e \cdot V_f}{1000}$$

Calculate average chip thickness (mm)

$$h_m = f_z \cdot \frac{\sqrt{a_e}}{D}$$

#### Explanation of terms

<b>V<sub>c</sub></b>	Cutting speed	in m/min
<b>n</b>	Rotational speed	in rpm
<b>V<sub>f</sub></b>	Feed rate	in mm/min
<b>F<sub>z</sub></b>	Feed per tooth	in mm/number of teeth
<b>z</b>	Number of teeth (cutting)	
<b>a<sub>p</sub></b>	Depth of cut	in mm
<b>a<sub>e</sub></b>	Width of cut	in mm
<b>h<sub>m</sub></b>	Average chip thickness	in mm
<b>Q</b>	Chip removal rate	in cm <sup>3</sup> /min
<b>D</b>	Diameter of tool	in mm